

## DS-2CC102/112/192P(N)-IRT IR Bullet Camera



### Specifications

	DS-2CC102P(N)-IRT	DS-2CC112P(N)-IRT	DS-2CC192P(N)-IRT
<b>Camera</b>			
Image sensor	1/3" Sony CCD		
Signal system	PAL / NTSC		
Effective pixels	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)
Min. Illumination	0.1 lux @ (F1.2, AGC on), 0 lux with IR 0.2 lux @ (F1.8, AGC on), 0 lux with IR		
Shutter Time	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s		
Lens	4 - 9 mm @ F1.8 (5 ~ 15 mm optional), adjusted by remote control Angle of view: 60° ~ 30° (4 ~ 9 mm)		
Lens Mount	Φ14		
Day & Night	Electronic		
Horizontal Resolution	420 TVL	480 TVL	540 TVL
Synchronization	Internal synchronization		
Video Output	1 Vp-p composite output (75Ω / BNC)		
S/N Ratio	More than 48 dB		
BLC	On		
<b>General</b>			
Operating Conditions	-10 °C ~ 60 °C (14 °F ~ 140 °F) Humidity 90% or less (non-condensing)		
Power Supply	12 VDC ± 10%, 24 VAC ± 10%		
Power Consumption	12W MAX		
Weather Proof Rating	IP66		
IR Range	Approx 30 to 40 meters		
Dimensions	104.2 × 87.8 × 190.1 mm (4.10" × 3.46" × 7.48")		
Weight	1000g (2.20 lbs)		


### Available models

DS-2CC102P-IRT, DS-2CC102N-IRT, DS-2CC112P-IRT  
DS-2CC112N-IRT, DS-2CC192P-IRT, DS-2CC192N-IRT

### Key features

- 1/3" Sony CCD
- Vari-focal lens with auto focus. wireless remote with zooming function
- Compact structure design
- Minimum illumination: 0.1lux @ F1.2 (0 lux with IR)
- Up to 40m IR range

### Dimensions

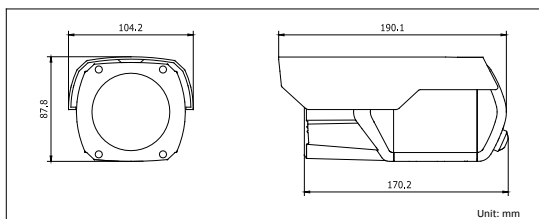

### Accessories



DS-121ZZJ-S  
(Indoor wall mount)