

DS-2CC1192P(N)-IR1/IR3/IR5/IRA 650TVL IR Bullet Camera




DS-2CC1192P(N)-IR1



DS-2CC1192P(N)-IR3/IR5



DS-2CC1192P(N)-IRA

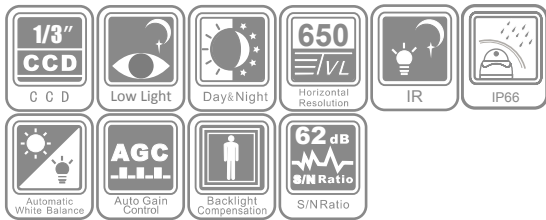

Key features

- 1/3" Sony EXVIEW HAD CCD II
- 650 TVL high resolution
- Up to 110m IR range
- Super low illumination
- Day / night auto switch
- IP66 rating


Specifications

	DS-2CC1192P(N)-IR1	DS-2CC1192P(N)-IR3	DS-2CC1192P(N)-IR5	DS-2CC1192P(N)-IRA
Camera				
Image sensor	1/3" SONY Exview HAD CCD II			
Signal system	PAL/NTSC			
Effective pixels	PAL: 976 (H) × 582 (V) NTSC: 976 (H) × 494 (V)			
Min. illumination	0.001 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.002 Lux @ (F1.8, AGC ON), 0 Lux with IR			0.001 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.0014 Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutter time	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s			
Lens	6 mm @ F1.8 (3.6 mm, 2.8 mm optional) Angle of view: 47° (6 mm)	12 mm @ F1.8 (3.6 mm, 6 mm, 8 mm, 16 mm optional), Angle of view: 22.72° (12 mm)	16 mm @ F1.8 (3.6 mm, 6 mm, 8 mm, 12 mm optional), Angle of view: 16.4° (16 mm)	25 mm @ F1.4 (16 mm optional) Angle of view: 13.5° (25 mm)
Lens mount	M12			CS mount
Day & night	Electronic			
Horizontal resolution	650 TVL			
Synchronization	Internal synchronization			
Video output	1Vp-p composite output (75Ω / BNC)			
S/N ratio	More than 62 dB			
BLC	On			
General				
Operating conditions	-30 °C - 60 °C (-22 °F - 140 °F) Humidity 90% or less (non-condensing)			
Power supply	12 VDC ± 10%			24 VAC ± 10%
Power consumption	Max. 3 W	Max. 6 W	Max. 8 W	Max. 15 W
Weather-proof rating	IP66			
IR range	approx 10 to 20 meters	approx 30 to 40 meters	approx 50 to 60 meters	Approx 100 to 110 meters
Dimensions	76.5×73.3×125.5 mm (3.01" × 2.89" × 4.94")	86.5 × 83 × 165.5 mm (3.41" × 3.27" × 6.52")		116.8 × 97.3 × 255.1 mm (4.60" × 3.83" × 10.04")
Weight	600 g (1.32 lbs)	1000 g (2.20 lbs)		2500 g (5.50 lbs)

Available models


DS-2CC1192P-IR1, DS-2CC1192N-IR1
 DS-2CC1192P-IR3, DS-2CC1192N-IR3
 DS-2CC1192P-IR5, DS-2CC1192N-IR5
 DS-2CC1192P-IRA, DS-2CC1192N-IRA

Dimensions

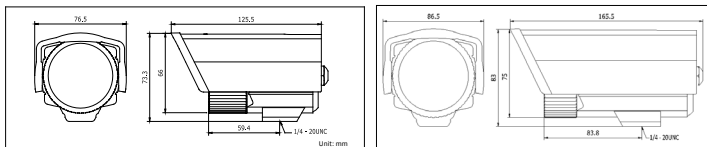

DS-2CC1192P(N)-IR1

DS-2CC1192P(N)-IR3/IR5

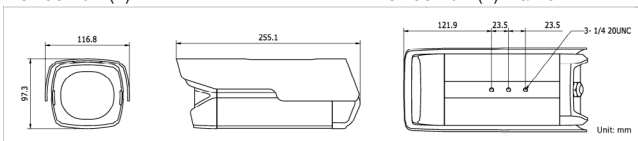

DS-2CC1192P(N)-IRA

Accessories



DS-1212ZJ-S (Expect DS-2CC1192P(N)-IRA)
(Indoor wall mount)

DS-1213ZJ-S
(Outdoor wall mount)