


DS-2CC502/572P(N)-IMB Vandal-Proof IR Dome Camera

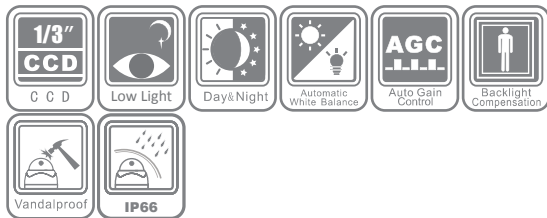

Key Features

- Compact structure design
- 1/3" Sony CCD
- Day / night auto switch
- Low illumination
- Rich image enhancements
- IP66 rating

Specifications

	DS-2CC502P(N)-IMB	DS-2CC572P(N)-IMB
Camera		
Image sensor	1/3" Sony CCD	
Signal system	PAL / NTSC	
Effective pixels	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)
Min. illumination	0.1 lux@F1.2, AGC on, 0 lux with IR	
Shutter time	PAL: 1/50s ~ 1/100,000s NTSC: 1/60s ~ 1/100,000s	
Lens	3.6mm (2.8mm, 6mm optional) Angle of view: 78° (3.6mm)	
Lens mount	M12	
Angle adjustment	Pan: 0 ~ 355°; tilt: 0 ~ 65°;	
Day & night	Electronic	
Horizontal resolution	420 TVL	540 TVL
Synchronization	Internal synchronization	
Video output	1Vp-p composite output (75 Ω / BNC)	
S/N ratio	More than 48 dB	
BLC	On	
General		
Operating conditions	-10°C ~ 60°C (14°F ~ 140°F) Humidity 90% or less (non-condensing)	
Impact protection	IEC 60068-2-75 test, Eh, 50J; EN 50102, up to IK10.	
Weather-proof rating	IP66	
IR range	Approx 10 ~ 20 meters	
Power supply	12 VDC ± 10%	
Power consumption	3W max.	
Dimensions	Φ 108 × 70 mm (Φ 4.25" × 2.76")	
Weight	450g (0.99 lbs)	

Available models

DS-2CC502P-IMB, DS-2CC572P-IMB
DS-2CC502N-IMB, DS-2CC572N-IMB

Dimensions

