

DS-2CC511/591P(N)-A Vari-focal Dome Camera




Specifications

	DS-2CC511P(N)-A	DS-2CC591P(N)-A
Camera		
Image sensor	1/3" Sony CCD	
Signal system	PAL / NTSC	
Effective pixels	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	
Min. illumination	0.1 lux@F1.2, AGC on	
Shutter time	PAL: 1/50s ~ 1/100,000s NTSC: 1/60s ~ 1/100,000s	
Lens	3.5 ~ 9mm @F1.2 (2.8 ~ 11mm optional) Angle of view: 80° ~ 30° (3.5 ~ 9mm)	
Lens mount	Φ 14	
Auto iris	DC Drive	
Angle adjustment	Pan: 0 ~ 355°; tilt: 0 ~ 80°; rotation: 0 ~ 140°	
Day & night	Electronic	
Horizontal resolution	480 TVL	540 TVL
Synchronization	Internal synchronization	
Video output	1 Vp-p composite output (75 Ω/BNC) Test monitor out [1Vp-p composite output (75 Ω/BNC), device line]	
S/N ratio	More than 48dB	
BLC	On / off	
General		
Operating conditions	-10°C ~ 60°C (14°F ~ 140°F) Humidity 90% or less (non-condensing)	
Power supply	24 VAC ± 10%, 12 VDC ± 10%	
Power consumption	3.5W max.	
Dimensions	Φ 122.8 × 109.1 mm (Φ 4.83" × 4.30")	
Weight	400g (0.88 lbs)	

Available models

DS-2CC511P-A, DS-2CC511N-A, DS-2CC591P-A, DS-2CC591N-A

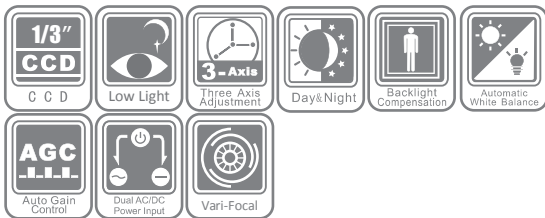

Key Features

- Compact design
- 1/3" Sony CCD
- Low Illumination
- Day / night with auto switch
- Auto white balance, auto gain control, electronic shutter control and backlight compensation

Dimensions

