


## DS-2CC5192P(N)-IR1/IR3 IR Weather-proof Dome Camera

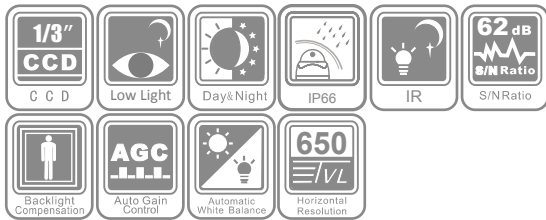

### Key features

- 1/3" Sony EXVIEW HAD CCD II
- 650 TVL high resolution
- Up to 40m IR range
- Super low illumination
- Day / night auto switch
- IP66 rating

### Specifications

DS-2CC5192P(N)-IR1/IR3	
<b>Camera</b>	
Image sensor	1/3" Sony EXVIEW HAD CCD II
Signal system	PAL / NTSC
Effective pixels	PAL: 976 (H) × 582 (V) NTSC: 976 (H) × 494 (V)
Min. illumination	0.001 lux@F1.2, AGC on, 0 lux with IR 0.002 lux@F1.8, AGC on, 0 lux with IR
Shutter time	PAL: 1/50s ~ 1/100,000s NTSC: 1/60s ~ 1/100,000s
Lens	"-IR1" series: 6mm @ F1.8 (3.6mm, 2.8mm optional) Angle of view: 47° (6mm) "-IR3" series: 12mm @ F1.8 (3.6mm, 6mm, 8mm, 16mm optional) Angle of view: 22.72° (12mm)
Lens mount	M12
Angle adjustment	Pan: 0 ~ 355°; Tilt: 0 ~ 75°;
Day / night	Electronic
Horizontal resolution	650 TVL
Synchronization	Internal synchronization
Video output	1Vp-p composite output (75Ω / BNC)
S/N ratio	More than 62 dB
BLC	On
<b>General</b>	
Operating conditions	-30°C ~ 60°C (-22°F ~ 140°F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	IR1: Max. 3 W IR3: Max. 6 W
Weather-proof rating	IP66
IR range	"-IR1" series: approx 10 ~ 20 meters "-IR3" series: approx 30 ~ 40 meters
Dimensions	Φ 129 × 80.1 mm (Φ 5.08" × 3.15")
Weight	700g (1.54 lbs)

### Available models

DS-2CC5192P-IR1, DS-2CC5192P-IR3  
DS-2CC5192N-IR1, DS-2CC5192N-IR3

### Dimensions

