


## DS-2CE1582P(N)-IR1/IR3 600 TVL DIS IR Bullet Camera



### Specifications

| DS-2CE1582P(N)-IR1(IR3) |  |
|-------------------------|--|
| <b>Camera</b>           |  |
| Image sensor            | 1/3" DIS   |
| Signal system           | PAL/NTSC   |
| Effective pixels        | 720(H)×480(V)  |
| Min. illumination       | 0.1Lux @ (F1.2,AGC ON),0 Lux with IR<br>0.2Lux @ (F1.8,AGC ON),0 Lux with IR   |
| Shutter time            | PAL: 1/25 s to 1/15,000 s<br>NTSC: 1/30 s to 1/15,000 s  |
| Lens                    | "-IR1" series: 3.6mm @ F1.8 (2.8mm, 6mm optional), Angle of view: 70° (3.6mm)<br>"-IR3" series: 12mm @ F1.8 (3.6mm, 6mm, 8mm, 16mm optional), Angle of view: 22.72° (12mm) |
| Lens Mount              | M12  |
| Angle Adjustment        | Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°   |
| Day & Night             | IR cut filter with auto switch   |
| Horizontal Resolution   | 600 TVL  |
| Synchronization         | Internal synchronization   |
| Video Output            | 1Vp-p composite output (75 Ω/BNC)  |
| S/N Ratio               | More than 52 dB  |
| <b>General</b>          |  |
| Operating conditions    | -40 °C ~ 60 °C (-40 °F ~ 140 °F)<br>Humidity 90% or less (non-condensing)  |
| Power supply            | 12 VDC ± 10%   |
| Power consumption       | "-IR1" series: 6.5W MAX<br>"-IR3" series: 7.5W MAX   |
| Housing                 | Weather-proof IP66-rated   |
| IR range                | "-IR1" series: Approx. 10 to 20 meters<br>"-IR3" series: Approx. 30 to 40 meters   |
| Dimensions              | 111.6 × 86.1 × 231.9 mm(4.39" × 3.39" × 9.13")   |
| Weight                  | 1000 g (2.20 lbs)  |

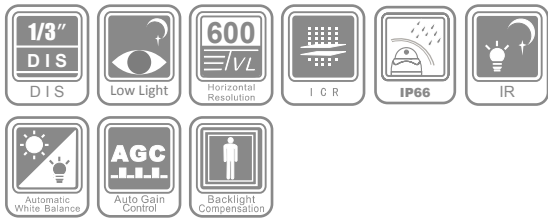

### Key features

- 1/3" DIS
- Min. illumination: 0.1 Lux @ F1.2 (0 Lux with IR)
- True Day/Night
- 3-axis (pan/tilt/rotation) positioning
- Wide operating temperature range
- IP66 rating

### Available models

DS-2CE1582P-IR1 , DS-2CE1582P-IR3, DS-2CE1582N-IR1, DS-2CE1582N-IR3

### Dimensions

