


DS-2CE5582P(N)-IR 600 TVL DIS IR Dome Camera

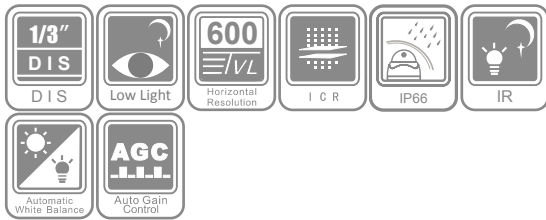

Specifications

DS-2CE5582P(N)-IR	
Camera	
Image sensor	1/3" DIS
Signal system	PAL/NTSC
Effective pixels	720 (H) × 480 (V)
Min. illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.2 Lux @ (F1.8, AGC ON), 0 Lux with IR
Shutter time	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	3.6 mm @ F1.8 (6 mm optional) Angle of view: 70.6° (3.6 mm)
Lens mount	M12
Angle adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & night	IR cut filter with auto switch
Horizontal resolution	600 TVL
Synchronization	Internal synchronization
Video output	1Vp-p composite output (75 Ω/BNC)
S/N ratio	More than 52 dB
General	
Working Temperature / Humidity	-40°C ~ 60°C (-40°F ~ 140°F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	Max. 2 W (Max. 5 W with IR cut filter on)
Weather-proof rating	IP66
IR range	Approx 10 to 20 meters
Dimensions	Φ 89.6 × 59.1mm (Φ 3.53" × 2.33")
Weight	400g (0.88 lbs)

Available models

DS-2CE5582P-IR, DS-2CE5582N-IR

Key features

- 1/3" DIS
- 600 TVL resolution
- 20m IR range
- Low illumination
- True day / night
- IP66 rating
- Wide operating temperature range

Dimensions

