


DS-2CE5582P(N)-IRP 600 TVL DIS IR Dome Camera

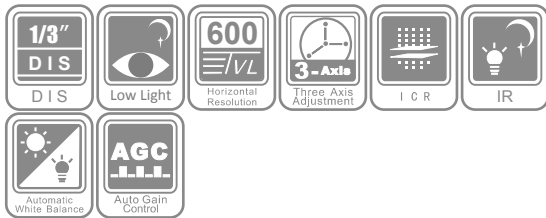

Specifications

| DS-2CE5582P(N)-IRP | |
|-----------------------|--|
| Camera | |
| Image sensor | 1/3" DIS |
| Signal system | PAL/NTSC |
| Effective pixels | 720 (H) × 480 (V) |
| Min. illumination | 0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.2 Lux @ (F1.8, AGC ON), 0 Lux with IR |
| Shutter time | PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s |
| Lens | 3.6 mm @ F1.8 (6 mm optional) Angle of view: 70.6° (3.6 mm) |
| Lens mount | M12 |
| Angle adjustment | Pan: 0 - 360°; Tilt: 0 - 85°; Rotation: 0 - 360° |
| Day / night | IR cut filter with auto switch |
| Horizontal resolution | 600 TVL |
| Synchronization | Internal synchronization |
| Video output | 1Vp-p composite output (75 Ω/BNC) |
| S/N ratio | More than 52 dB |
| General | |
| Operating conditions | -40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing) |
| Power supply | 12 VDC ± 10% |
| Power consumption | Max. 2 W (Max. 5 W with IR cut filter on) |
| IR Range | Approx. 10 to 20 meters |
| Dimension | Φ 89.5 × 69.8 mm (Φ 3.52" × 2.75") |
| Weight | 200 g (0.44 lbs) |

Available models

DS-2CE5582P-IRP, DS-2CE5582N-IRP

Key features

- 1/3" DIS
- 600 TVL resolution
- 20m IR range
- Low illumination
- True day / night
- 3-axis adjustment
- Wide operating temperature range

Dimensions

