


DS-4304HFHI-E High Definition Compression Card

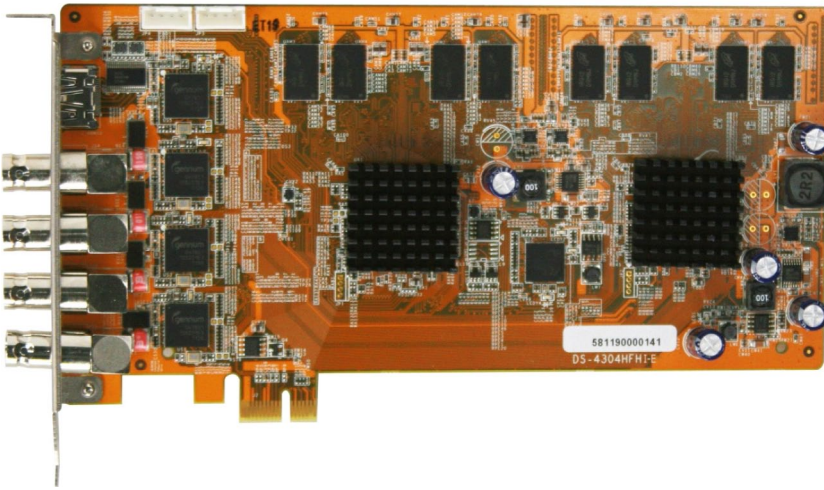

Key Features

- H.264 real-time video compression
- 1920×1080P resolution real-time recording
- HDMI output at up to 1920×1080P resolution
- Dual-stream
- PCI-Ex1 2.0 standard
- OSD, LOGO and mask area settings

Specifications

	DS-4304HFHI-E
Dimensions (mm)	199×96
PCI Standard	PCI-Ex1 2.0
Video Compression	H.264 (MPEG-4/part10)
Video Input	4-ch
Video Input Interface	HD-SDI/BNC (1.0Vp-p, 75Ω)
Video Standard	PAL/NTSC adaptive
Live View Resolution	Up to 1920×1080P
Playback Resolution	Up to 1920×1080P
Frame Rate	1~25 fps (PAL), 1~30 fps (NTSC)
Video Recording Bit Rate	32K - 16M
Video Output Interface	1, HDMI
Output Resolution	Up to 1920×1080P
Audio Compression	OggVorbis
Audio Input	4-ch
Audio Input Interface	BNC (2Vp-p, 1kΩ, volume adjusting range: 83DB)
Audio Output Interface	1, BNC
Sampling Rate	16KHz
Audio Recording Bit Rate	16Kbps
Power Consumption	<15.5W