


DS-7604/7608NI-S Embedded NVR



DS-7608NI-S



DS-7604NI-S

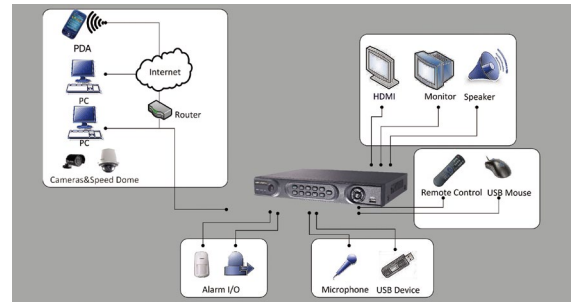


Key features

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- VGA output at up to 1024×768 resolution
- 4-ch synchronous playback
- HDD group management

Specifications

	DS-7604NI-S	DS-7608NI-S
Video / Audio input		
IP Video input	4-ch 4CIF real time or 2-ch 720P / UXGA / 1080P real time or 1-ch 2560×1920 not real time	8-ch 4CIF real time or 4-ch 720P / UXGA / 1080P real time or 2-ch 2560×1920 not real time
Audio input	1-ch, RCA(2Vp-p, 1kΩ), for voice talk input	
Video/Audio output		
Live view resolution	PAL:704×576, NTSC:704×480	
VGA output	1-ch, resolution:1024×768/60Hz	
Playback resolution	2560×1920/UXGA/1080P/720P/4CIF/VGA/DCIF/2CIF/CIF/QCIF	
Video output	1-ch, BNC (PAL: 704×576, NTSC: 704×480)	
Frame rate	1/16~25 fps (P) / 30fps (N)	
Video bit rate	32 Kbps~2048 Kbps, or user defined (Max. 16384 Kbps)	
Audio output	1-ch, RCA(2Vp-p, 1kΩ), for voice talk output	
Audio bit rate	16kbps	
Synchronous playback	4-ch	
Hard disk		
Type	1 SATA interface	2 SATA interfaces
Capacity	Up to 2TB capacity for each disk	
External interface		
Network interface	1, RJ45 10M/100M adaptive Ethernet interface	
Serial interface	1 RS-485 interface	
USB interface	2, USB2.0	
Alarm in	4	
Alarm out	1	
General		
Power supply	12 VDC	
Consumption	≤ 12W (without hard disk or DVD-R/W)	
Working temperature	-10 °C ~ +55 °C	
Working humidity	10%~90%	
Chassis	19-inch rack mounted 1U chassis	
Dimensions (W x D x H)	315 × 230 × 45 mm	445 × 290 × 44 mm
Weight	≤ 2.5Kg (without HDD or DVD-R/W)	≤ 8 Kg (without HDD or DVD-R/W)

Rear Panel of DS-7604NI-S

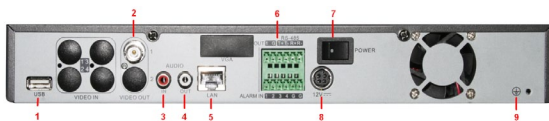

1. USB interface
2. Video out
3. Audio in
4. Audio out
5. LAN
6. RS-485 interface, alarm in, alarm out
7. Power switch
8. 12VDC power supply
9. GND