


IP Module Digital Video Server

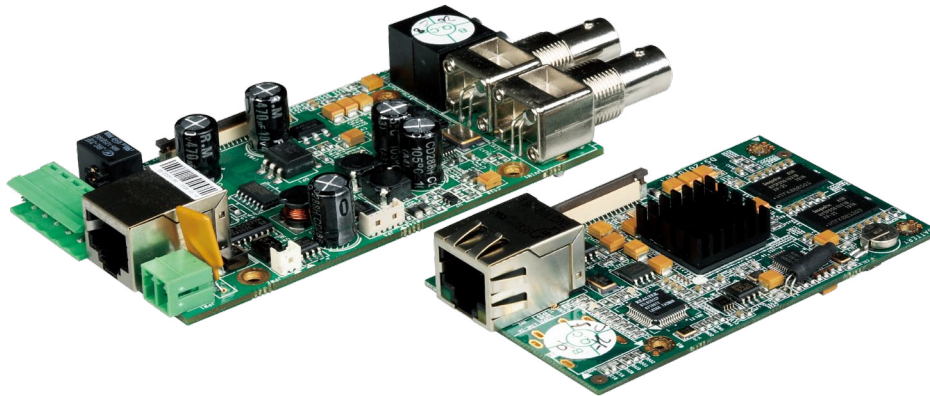

Key features

Hivision IP module applies Embedded Linux OS and the latest TI DaVinci DSP platform. The product can be embedded into analog camera and analog speed dome to build IP camera and IP dome. With chassis board, IP module also can be used as one channel network digital video server

Specifications

IP Module	
Video / Audio input	
Video compression	H.264
Video input	1-ch
Video input interface	BNC (1.0Vp-p, 75 Ω)
Audio compression	OggVorbis, 16 Kbps
Audio input	1-ch
Audio input interface	BNC (2.0 Vp-p, 1 kΩ)
Voice talk input	1-ch, 3.5 mm audio interface (2.0 Vp-p, 1 kΩ)
Video / Audio output	
Encoding resolution	4CIF / DCIF / 2CIF / CIF / QCIF
Frame rate	25 fps (P) /30 fps (N)
Stream type	Video, Video & Audio
Dual-stream	Support
Video bit rate	32 Kbps ~ 2 Mbps, or user defined (Max. 8 Mbps)
Audio output	1-ch, 3.5 mm audio interface (2.0 Vp-p, 600 Ω)
External interface	
Network interface	1 RJ45 10M /100M self-adaptive Ethernet interface
RS-232 Port	1 RJ45 RS-232 Port
RS-485 port	1 (T+, T-)
Alarm in	1
Alarm out	1
General	
Power supply	12 VDC
Consumption	≤ 12 W
Working temperature	-10 °C ~ +55 °C
Working humidity	10% ~ 90%
Dimensions	Compression board: 48 x 80 mm Chassis board: 53 x 94 mm
Weight(without HDD)	≤ 0.5 kg