



Dynamic Microphone

MD-110V/510V/710V, NMD-810V, SCM-6000V





MD-110V



100Hz -78.1dB
500Hz -75.4dB
1000Hz -74.8dB
2000Hz -71.9dB
5000Hz -68dB
10000Hz -64dB





NMD-810V



100Hz -73.4dB
500Hz -76.1dB
1000Hz -75.7dB
2000Hz -75.9dB
5000Hz -72.9dB
10000Hz -67dB





MD-510V



100Hz -76.8dB
500Hz -74.1dB
1000Hz -72.6dB
2000Hz -69.4dB
5000Hz -64.5dB
10000Hz -58.9dB





SCM-6000V



100Hz -71.3dB
500Hz -71.9dB
1000Hz -72dB
2000Hz -70.2B
5000Hz -69.3dB
10000Hz -63.1dB



MD-710V



100Hz -72.2dB
500Hz -76.3dB
1000Hz -74.4dB
2000Hz -71.2dB
5000Hz -69.4dB
10000Hz -62.8dB

Spec	MD-110V	MD-510V	MD-710V	NMD-810V	SCM-6000V
Type	Moving Coil Dynamic Microphone				
Frequency Response	55Hz~16kHz	55Hz~16kHz	55Hz~16kHz	50Hz~17kHz	50Hz~17kHz
Sensitivity	-75dB ±3dB	-75dB ±3dB	-75dB ±3dB	-75dB ±3dB	-75dB ±3dB
Impedance	600Ω ±30%	600Ω ±30%	600Ω ±30%	600Ω ±30%	350Ω ±30%
Weight (without cable)	250g ±10g 0.55lb ±0.02lb				260g ±10g 0.57lb ±0.02lb
Dimension (WxHxD)	ø51x174mm ø2 × 6.9in		ø54 x174mm ø2 × 6.9in		ø47.5x180mm ø2 × 7.1in


Remote Microphone

RM-01



Features

- Unidirectional dynamic microphone
- Remote chime switch
- Mic on/off switch
- 2 Push buttons for easy operation

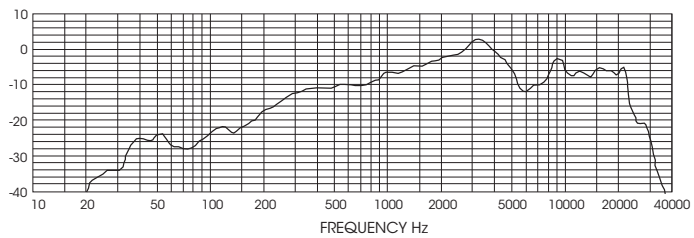

Spec	RM-01
Type	Dynamic Microphone
Direction	Unidirectional
Sensitivity	-75dB±3dB
Impedance	600Ω
Frequency Response	100Hz~18kHz
Weight	1.4kg / 3.1lb
Dimension (W×H×D)	90 × 45 × 133mm / 3.5 × 1.8 × 5.2in


Remote Microphone

RMC-01



Features

- Unidirectional Condenser microphone
- Remote chime switch
- Mic on/off switch
- 2 Push buttons for easy operation

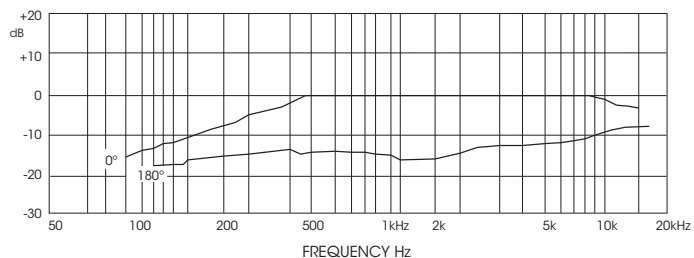

Spec	RMC-01
Type	Condenser Microphone
Direction	Unidirectional
Sensitivity	-75dB±3dB
Impedance	400Ω
Frequency Response	60Hz~18kHz
Weight	1.4kg / 3.1lb
Dimension (W×H×D)	90 × 45 × 133mm / 3.5 × 1.8 × 5.2in

